






# COMMON CR<sub>5</sub>


User Guide 1.0EN

## + Package Contents


			
COWON CR5		Portable Charging Cradle	Quick Guide
			
Small(2EA)      Medium(2EA)      Large(2EA)			
Ear Tips		Micro USB Cable	

\* Actual package contents may differ from the above images.

## + Before you start \_ Names of Parts and Functions

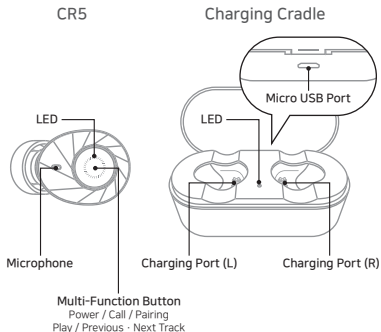


## + Before you start \_ Precautions



For charging please remove the protective film from the earphone charging terminal.

## + Before you start \_ Charging

### CR5 Charging



**Charging :** The white LED Indicator on your earphones turns on

**Charging Complete :** The white LED Indicator on your earphones turns off

### Charge the Charging Cradle



**Charging Status :** Charging cradle LED Indicator blink blue

0%~25%	= 1time
25%~50%	= 2times
50%~75%	= 3times
75%~100%	= 4times
Fully Charged	= Stays solid

\* Please charge the charging cradle periodically. When the cradle battery is discharged, the earphone units may turn-on instead of being charged, causing the earphone to be discharged.

## + Using the Product \_ Power On / Off

### Auto



### Manual




**Power On / Off : 4 Sec Press**

## + Using the Product \_ Pairing & connection

After the initial pairing, the CR5 and your smartphone will connect automatically when the CR5 is on and Bluetooth is enabled on your phone.

### Dual Mode

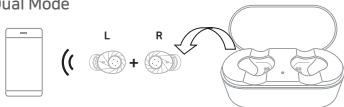

Dual Mode : The CR5's left and right earphones can be used together in stereo.

1. When both earphones are removed at the same time from the charging cradle, they will automatically turn on , connect to each other, and enter pairing mode following an audible beep.
2. Turn on Bluetooth on your smartphone or Bluetooth-capable device, and select 'CR5 Bluetooth L' from the list of detected devices to pair and connect automatically.

\* To use Dual Mode, both the left and right earphones must be turned on.

### Single Mode



Single Mode : The CR5's left and right earphones can be used individually in mono.

1. Pair the CR5 in Dual Mode as previously shown.
2. Turn off both the left and right earphones.
3. Press and hold the button on the right earphone for 6 seconds to enter pairing mode for only the right earphone. (Even if you have heard the "Power On" voice, please continue to press until you hear "Pairing Mode".) Pair the detected right earphone(CR5 Bluetooth R) to your smartphone.

You can now turn on and use only the desired unit.

## + Using the Product \_ Listening to Music · Calling



### Listening to Music

Play · Pause	
Next Track	
Previous Track	

### Calling

Answering a call · Ending a call	
Rejecting a call	

\* When using Dual Mode, the sound can be heard from both left and right earphones during calls. Mic only operates on left earphone so make sure to put the left earphone near your mouth during calls.

\* In Single Mode, each earphone will output sound with both microphones enabled for use.

\* In Dual Mode, L unit connects to your smartphone.

\* By using the CR5 in Single Mode, you can alternate between charging the left and right earphones for extended use. (Audio books, Podcasts, etc.)

\* Since Single Mode uses only one earphone, you can stay aware of environmental sounds and use the device more safely when walking or bicycling.

\* Keep the product and a mobile phone within 1 meter when pairing.

\* If passkey input is required, enter a password or a PIN No.'0000'.

\* When the CR5 is off, press and hold the multifunction button for 6 seconds to enter pairing mode.

\* When powered on, the earphones will automatically connect to the most recently connected devices.

\* Press and hold the multifunction button for 1 second to launch the voice recognition feature of your smartphone or tablet. (Android OS : Google Assistant / IOS : Siri / Window OS : Cortana - Except during calls)

## + Status LED

	Status		Blinking Pattern
CR5 Earbuds	Charging		White LED stays on
	Charging Complete		White LED turns off
	Power On		Blue LED Blinks once
	Power Off		White LED Blinks once
	Pairing Mode		White and blue LED blinks alternately
	Play / Standby Mode		Blue LED blinks every 7 seconds
	Status	Battery Power	Blinking Pattern
Charging Cradle	Charging	0~25%	White LED blinks once
		25~50%	White LED blinks twice
		50~75%	White LED blinks three times
		75~100%	White LED blinks four times
	Charging Complete	100%	White LED stays on

## + Voice Prompts

	Status	Voice Prompts
CR5 Earbuds	Power On/ Power Off	"Power ON" / "Power Off"
	Pairing Mode	"Pairing Mode"
	L, R Connection (Dual Mode)	L : "Left Channel" R : "Right Channel"
	Connected to Bluetooth Device	"Pairing Successful"
	Bluetooth Connection (Dual Mode)	"Connected"
	Disconnected	"Disconnected"
	Incoming call	"Incoming Call" *
	Low Battery	"Battery Low"

\* For iPhone, user ringtone will be applied.

## + Specification

Bluetooth Version	V5.0
Bluetooth Profiles	HSP / HFP / A2DP / AVRCP
Standby Time	Up to 150 hours
Music-Playing Time	Single Mode : About 7.5 hours Dual Mode : About 5 hours
Charging Time	CR5 : About 1 hours * Charging Cradle : About 1 hours
Battery	CR5: 3.7V / 50mAh Charging Cradle : 5V / 500mAh
Input	DC 5V / 500mA
Operating Distance	Up to 10m (Free space)
Weight	CR5 : 4g x 2 Charging Cradle : 41g

\* Number of available CR5 charges using charging cradle (500mAh) : 3~4 times (with fully charged charging cradle)



DIGITAL PRIDE.

**©©WON**