
ECK₂₀ANC

User Guide 1.0 ENG

+ Package Components

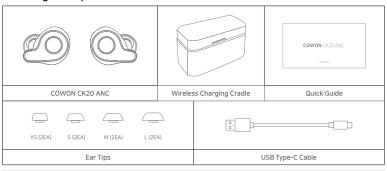

^{*} Actual package contents may vary from the above images.

^{*} M-size eartips are pre-installed to the earphones.

+ Before you start _ Wearing





* For charging, please remove the protective film from the earphone charging terminal.





* Check the L and R marks on the earphones and put them in the correct ears.
















* Position them properly by twisting and rotating the eartips to fit in your ears.

+ Before you start _ Names of Parts and Functions

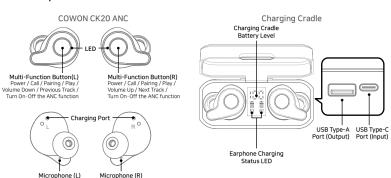

+ Before you start _ Charging

Charging the Earphones



Place the earphones in the cradle to start charging them automatically.




* Make sure that the earphone is properly positioned in the fixing groove of the charging cradle and check if the earphone LED is on,

+ Before you start _ Charging

Charging the Cradle

Wired Charging



Insert the USB cable in the USB-C port and connect it to the power adapter to charging cradle goes from 0 to 100%. Start charging.

Charging: 0-99%
Charging completed: 100%

* Please charge the cradle periodically.

Wireless Charging



You can charge CK20 ANC simply by placing the cradle on the wireless charging pad without connecting the cable to the cradle,

* Please place the cradle on the wireless charging pad and check if the earphone LED is on,

* The wireless charging pad is not included.

+ Before you start _ Charging

Charging the Smartphone (Use the Cradle as a Power Bank)



Insert the USB cable in the USB-A port and connect it to the smartphone to use the cradle as a power bank,

Charging Cradle Battery Level 100% → 0%



While charing the smartphone, the battery level in the cradle goes down from 100 to 0%

* The cradle limits the output current to 1.5A. When the battery level is too low, it may not be possible to charge a smartphone that supports fast charging.

+ Using the Product _ Auto Power On · Off

Auto power-on



Opening the lid of the cradle turns on the earphones automatically,

Auto power-off



Closing the lid of the cradle turns off the earphones automatically,

Manual Power On / Off

* Press the button on the earphone for 3 seconds to turn it on when the power is off, (The blue LED flashes three times)
* Press the button on the earphone for 3 seconds to turn it off when the power is on, (The red LED flashes three times)


+ Using the Product _ Pairing & Connection



| | Open the cradle lid | Turn on Bluetooth | Connect | |
|------------------|---|---|--|--|
| Description | Opening the cradle lid turns on the earphones automatically, and they are ready to proceed to the pairing step. | Turn on Bluetooth on your smartphone or Bluetooth-capable device. | Select 'CK20 ANC' from the list of detected devices to pair and connect automatically. | |
| Voice Prompts | *Power On" | "Pairing" | "Connected" | |
| LED | -•(-×3 Blue | | -•(-×1 Blue | |

- * The CK20 ANC supports: Dual mode (Stereo) to use the left and right earphones together and Single mode (Mono) to use them separately,
- * By using the CK20 ANC in Single Mode, you can alternate between charging the left and right earphones for extended use. (Audio books, Podcasts, etc.)
- * Since Single Mode uses only one earphone, you can stay aware of environmental sounds and use the device more safely when walking or riding bicycles.
- * Remove both the left and right earphones from the charging cradle for use in Dual Mode, or only remove one earphone for use in Single mode.
- * Putting one earphone in the charging cradle while in Dual mode does not disconnect the other earphone in use,
- * After the initial pairing, opening the cradle lid automatically connects the earphones to the most recently connected device,
- * Keep the product and a mobile phone within 1 meter when pairing.
- * If passkey input is required, enter a password or a PIN No.'0000'.

+ Using the Product _ Listening to Music · Making a Call · Volume Control



- In Dual mode, the microphone of the earphone removed from the cradle first will be enabled. Removing L and R earphones from the cradle at the same time enables the "R" microphone.
- In Single Mode, each earphone will output sound with both microphones enabled for use,
- Use the L earphone to go to the previous track and the R earphone to go to the next track. (In Single mode, only the functions on the earphone currently in use are available.)
- Use the Volume Down function with the L earphone and Volume Up function with the R earphone. (In Single mode, only the functions on the earphone currently in use are available.)
- Press and hold the multifunction button 3 times to launch the voice recognition feature of your smartphone or tablet. (Android OS: Google Assistant / IOS: Siri / Window OS: Cortana - Except during calls and playing)
 - * Voice assistant not available when Music is playing.
- Press the button for 2 seconds to activate the ANC (Active Noise Canceling) function,
- When you press the button for 2 seconds again while ANC is on, Transparency Mode will be activated with a beep sound,
- 7) Press the button for 2 seconds in Transparency Mode to deactivate the ANC function.

+ Voice Prompts

| Status | Voice Prompts | |
|----------------------|-------------------|--|
| Power On | "Power On" | |
| Power Off | "Power Off" | |
| Pairing | "Pairing" | |
| Bluetooth Connection | "Connected" | |
| Incoming call | "Incoming call" * | |
| Disconnected | "Disconnected" | |
| ANC ON | "ANC ON" | |
| Transparency Mode | (| |
| ANC OFF | "ANC OFF" | |
| Battery Low | "Battery Low" | |
| | | |

^{*} For iPhone, user ringtone will be applied.


+ Specification

| • | |
|----------------------------|--|
| Bluetooth Version | V5.0 |
| Bluetooth Profiles | HSP / HFP / A2DP / AVRCP |
| Standby Time | Up to 130 hours |
| Music-Playing Time | Dual Mode : About 7 hours (ANC Mode : About 6 hours) Single Mode : About 6 hours |
| Charging Time | Earphones: About 1.5 hours * Charging Cradle: About 3 hours (Wired Charging) About 6.5 hours (Wireless Charging) |
| Earphone Battery | 3.7V / 50mAh |
| Charging Cradle Bettery | Input: USB-C, 5V-1A Output: USB-A, 5V-1A Wireless Charging: 5V-0.5A Capacity: 2600mAh |
| Operating Distance | Up to 10m (Free space) |
| Weight | Earphones : 6.3g x 2 Charging Cradle : 95g |

^{*} Number of available CK20 ANC charges using cradle (2600mAh) : About 17 times (with fully charged cradle)

+ Precautions Resetting to Dual Mode (When the L and R units are not connecting to each other)

- * Use the following method for troubleshooting purposes only, not during normal operation, when the left and right earphones are not connected.
- * Refer to 'Pairing & Connection' page when connecting the product to a smart device for the first time.
- * If the L and R units only connect in single mode during normal dual-mode operation, reset to dual mode by following the instructions below.



| Delete connected device & Turn off Bluetooth | Remove earphones & Press the button twice | Check for purple LED | Turn on Bluetooth | Connection |
|---|--|---|---|---|
| Delete the [CK20 ANC] device connected to your smartphone or other Bluetooth device and turn off Bluetooth. | Remove the left and right earphones from the cradle, and immediately press and release the buttons twice simultaneously. | The LEDs on the left and right earphones turn purple, and the earphones switch to the pairing mode. | Turn on Bluetooth on your smartphone or other Bluetooth device. | Select [CK20 ANC] from the detected devices to complete pairing and connect automatically. |

