








COMMON CT<sub>12</sub>

User Guide 1.0 EN

## + Package Contents


		
COWON CT12	Portable Charging Cradle	Quick Guide
   <p>S                      M                      L</p>		
Ear Tips	Micro USB Cable	

\* Actual package contents may differ from the above images.


\* L-size eartips are attached to the earphones.

## + Before you start \_ Names of Parts and Functions

### COWON CT12




### Charging Cradle




\* The touch sensitivity has been adjusted to minimize unintended operations, Increase the contact area when pressing a button with your finger.

## + Before you start \_ Wearing




\* Check the L and R marks on the earphones and put them in the correct ears.

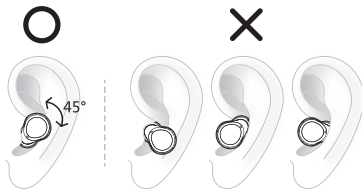


\* Wear them in a proper way by twisting and rotating the eartips to fit in your ears.


## + Before you start \_ Charging (Earphones)



Put the earphones in the charging cradle to start charging them automatically.




The LED indicates the status of the battery charge.  
(Charging : ● Blue /  
Charging Complete : ○ Off)




\* Make sure that the earphone is properly positioned in the fixing groove of the charging cradle and check if the earphone charging status LED is on.  
(Light ON after 3 seconds)

## (Charging Cradle)



Put the USB cable in the Micro USB port and connect it to the power adapter to start charging.




Status		LED
Charging	0~25%	●
	25~50%	● ●
	50~75%	● ● ●
	75~100%	● ● ● ●
Complete	100%	● ● ● ●


The charging cradle battery indicates 4 levels of charging.

\* Please charge the charging cradle periodically.

## + Using the Product \_ Power On · Off



When both earphones are removed from the charging cradle, they will automatically turn on.




When inserting the earphones into the charging cradle, the earphone will automatically get turned off.

\* It will turn off automatically after 5 minutes if without any connection with mobile phone when it turns on.

## + Using the Product \_ Pairing & Connection

1



2




















3



Remove Earphones	Remove Earphones	Connection
When both earphones are removed at the same time from the charging cradle, they will automatically turn on, connect to each other, and enter pairing mode following the "Pairing" voice.	Turn on Bluetooth on your smartphone or Bluetooth-capable device.	Select 'CT12 Bluetooth' from the list of detected devices to pair and connect automatically.

- \* The CT12 supports: Dual mode (Stereo) to use the left and right earphones together and Single mode (Mono) to use them separately.
- \* Remove both the left and right earphones from the charging cradle for use in Dual Mode, or only remove one earphone for use in Single mode.
- \* Putting one earphone in the charging cradle while in Dual mode does not disconnect the other earphone in use.
- \* After the initial pairing, opening the charging cradle lid automatically connects the earphones to the most recently connected device.

## + Using the Product \_ Listening to Music · Calling · Volume Control


	L	R
 ×1	 Play · Pause  <sup>1)</sup> Answering a call	 Play · Pause  <sup>1)</sup> Answering a call
 3sec	 Rejecting a call	 Rejecting a call
 ×2	 <sup>2)</sup> Previous Track	 <sup>2)</sup> Next Track
 ×3	 <sup>3)</sup> Voice Recognition	 <sup>3)</sup> Voice Recognition
 Press & Hold	 <sup>4)</sup> Volume Down	 <sup>4)</sup> Volume Up

- 1) In Dual mode, the microphone of the earphone removed from the cradle first will be enabled. Removing L and R earphones from the cradle at the same time enables the "R" microphone. In Single Mode, each earphone will output sound with both microphones enabled for use.
- 2) Use the L earphone to go to the previous track and the R earphone to go to the next track. (In Single mode, only the functions on the earphone currently in use are available.)
- 3) Press and hold the multifunction button for 3 times to launch the voice recognition feature of your smartphone or tablet. (Android OS : Google Assistant / iOS : Siri / Window OS : Cortana - Except during calls)
- 4) Use the Volume Down function with the L earphone and Volume Up function with the R earphone. (In Single mode, only the functions on the earphone currently in use are available.)

- By using the CT12 in Single Mode, you can alternate between charging the left and right earphones for extended use. (Audio books, Podcasts, etc.)
- Since Single Mode uses only one earphone, you can stay aware of environmental sounds and use the device more safely when walking or bicycling.
- Keep the product and a mobile phone within 1 meter when pairing.
- If passkey input is required, enter a password or a PIN No.'0000'.



## + Voice Prompts

Status	Voice Prompts
Power On	"Power On"
L, R Units Connection	"TWS Connected"
Pairing	"Pairing"
Bluetooth Connection	"Connected"
Disconnected	"Disconnected"
Incoming call	
Low Battery	"Battery Low"


## + Specification

Bluetooth Version	V5.0
Bluetooth Profiles	HSP / HFP / A2DP / AVRCP
Standby Time	Up to 150 hours
Music-Playing Time	Single Mode : About 12 hours Dual Mode : About 12 hours
Charging Time	CT12 : About 1 hour * Charging Cradle : About 2 hours
Battery	CT12 : 3.7V / 80mAh Charging Cradle : 7V / 400mAh
Input	DC 5V / 330mA
Operating Distance	Up to 10m (Free space)
Weight	CT12 : 4.3g x 2 Charging Cradle : 32.8g

\* Number of available CT12 charges using charging cradle (400mAh) :  
2~3 times (with fully charged charging cradle)

## + Precautions \_ Reset to Dual Mode (When the L and R unit are not connecting to each other)

- \* Refer to page 'Pairing & Connection' when connecting the product to a smart device for the first time.
- \* If the L and R units only connect in single mode during normal dual-mode operation, reset to dual mode by following the instructions below.
- \* If it fails to reset, start again from Step ②.

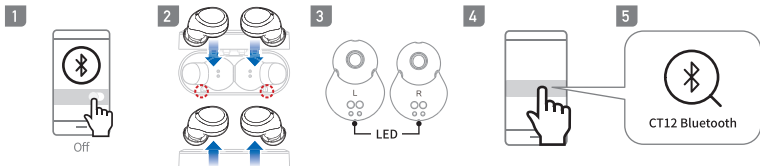

Delete connected device & Turn off Bluetooth	Turn off the earphones and turn them on again	Turn off the earphones and turn them on again	Turn on Bluetooth	Connection
Delete the [CT12 Bluetooth] device registered on your smartphone or other Bluetooth device and turn off Bluetooth.	Put the left and right earphones in the cradle, check that the Charging Status LED is on, and then take out the left and right earphones from the cradle.	The LEDs of the left and right earphones flash, and after about 10 seconds, only the LED of the right earphone flashes.	Turn on Bluetooth on your smartphone or other Bluetooth device.	Select [CT12 Bluetooth] from the detected devices to complete pairing and automatically connect.

DIGITAL PRIDE.

**©©WON**