







# COWON CX<sub>5</sub>

User Guide 1.1EN


## + Package Contents

					
<p><b>COWON CX5</b></p>	<p><b>Portable Charging Cradle</b></p>	<p><b>Quick Guide</b></p>			
					
<p>Small(2EA)</p>	<p>Medium(2EA)</p>	<p>Large(2EA)</p>	<p>Normal Type(2EA)</p>	<p>Hook Type(2EA)</p>	
<p><b>Ear Tips</b></p>			<p><b>Silicone Covers</b></p>		<p><b>Micro USB Cable</b></p>


\* Actual package contents may differ from the above images.

## + Before you start \_ Names of Parts and Functions

COWON CX5



Portable Charging Cradle

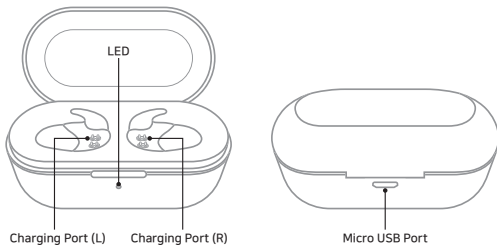

## + Before you start \_ Charging

### CX5 Charging



**Charging :** The white LED Indicator on your earphones turns on

**Charging Complete :** The white LED Indicator on your earphones turns off

### Charging the Changing Cradle



**Charging Status :** Charging cradle LED Indicator blink blue

0%~25% = 1time

25%~50% = 2times

50%~75% = 3times


75%~100% = 4times

Fully Charged = Stays solid


\* Please charge the charging cradle periodically.  
When the cradle battery is discharged, the earphone units may turn-on instead of being charged, causing the earphone to be discharged.

## + Using the Product \_ Power On / Off

### Auto

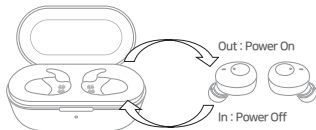


### Manual




## + Using the Product \_ Pairing & connection

### Dual mode

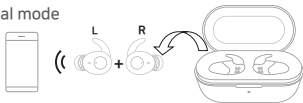

### Single mode



- \* Use one of the following methods to switch from Single Mode to Dual Mode.
  - Press the multifunction button on the earphone that is not connected and wait briefly to switch to Dual Mode.
  - Turn off both units, then turn them on again (power cycling). Connect the units in Dual Mode.
- \* Keep the product and a mobile phone within 1 meter when pairing.
- \* If passkey input is required, enter a password or a PIN No. '0000'.
- \* When the CX5 is off, press and hold the multifunction button for 6 seconds to enter pairing mode.
- \* When powered on, the earphones will automatically connect to the most recently connected devices.

After the initial pairing, the CX5 and your smartphone will connect automatically when the CX5 is on and Bluetooth is enabled on your phone.

**Dual mode :** The CX5's left and right earphones can be used together in stereo.

1. When both earphones are removed at the same time from the charging cradle, they will automatically turn on, connect to each other, and enter pairing mode following an audible beep.
2. Turn on Bluetooth on your smartphone or Bluetooth-capable device, and select 'CX5 Bluetooth L' from the list of detected devices to pair and connect automatically.

\* To use Dual Mode, both the left and right earphones must be turned on.

**Single mode :** The CX5's left and right earphones can be used individually in mono.

1. Pair the CX5 in Dual Mode as previously shown.
2. Turn off both the left and right earphones.
3. Press and hold the button on the right earphone for 6 seconds to enter pairing mode for only the right earphone. Pair the detected right earphone(CX5 Bluetooth R) to your smartphone.

You can now turn on and use only the desired unit.

- \* In Dual Mode, L unit connects to your smartphone.
- \* By using the CX5 in Single Mode, you can alternate between charging the left and right earphones for extended use. (Audio books, Podcasts, etc.)
- \* Since Single Mode uses only one earphone, you can stay aware of environmental sounds and use the device more safely when walking or bicycling.

## + Using the Product \_ Listening to Music · Calling



### Listening to Music


Play · Pause	
Next Track	
Previous Track	

### Calling


Answering a call Ending a call	
Rejecting a call	

- When using Dual Mode, sound will only be output to the left earphone during calls.
- In Single Mode, each earphone will output sound with both microphones enabled for use.
- Press and hold the multifunction button for 1 second to launch the voice recognition feature of your smartphone or tablet.  
(Android OS: Google Assistant / iOS: Siri / Window OS: Cortana - Except during calls)

## + Using the Product \_ Precautions

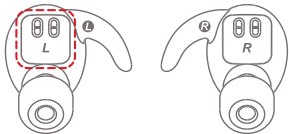

Do not let the silicone covers cover the earphone charging protrusions.

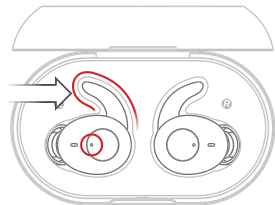

Make sure that the earphone hook is properly positioned in the fixing groove of the charging cradle and check if the earphone LED is on.

## + Status LED

	Status	Blinking Pattern	
CX5 Earbuds	Charging	White LED stays on	
	Charging Complete	White LED turns off	
	Power On	Blue LED Blinks once	
	Power Off	White LED Blinks once	
	Pairing Mode	White and blue LED blinks alternately	
	Playback / Standby Mode	Blue LED blinks every 7 seconds	
	Status	Battery Power	Blinking Pattern
Charging Cradle	Charging	0~25%	White LED blinks once
		25~50%	White LED blinks twice
50%~75%		White LED blinks three times	
75~100%		White LED blinks four times	
	Charging Complete	100%	White LED stays on

## + Voice Prompts

	Status	Voice Prompts
CX5 Earbuds	Power On/ Power Off	Power ON / Power Off
	Pairing Mode	Pairing
	L, R Connection (Dual Mode)	L : Left Channel R : Right Channel
	Bluetooth Connection (Single Mode)	Connected
	Bluetooth Connection (Dual Mode)	Second Device Connected
	Disconnected	Disconnected
	Incoming call	Incoming Call
	Low Battery	Low Battery



## + Specification

Bluetooth Version	V5.0
Bluetooth Profiles	HSP / HFP / A2DP / AVRCP
Standby Time	Up to 150 hours
Music-Playing Time	Single Mode - About 7.5 hours Dual Mode - About 5 hours
Charging Time	CX5 - About 1 hours* Battery Case - About 1 hours
Battery	CX5: 3.7V / 50mAh Charging cradle 5V / 500mAh
Input	DC 5V / 500mA
Operating Distance	Up to 10m (Free space)
Weight	CX5: 5g x 2 Charging cradle : 36g

\* Number of available CX5 charges using charging cradle (500mAh): 3~4 times (with fully charged charging cradle)

DIGITAL PRIDE.

**©WON**